M-12401 2

NOTES: (UNLESS OTHERWISE SPECIFIED)
1. DIMENSIONS ARE IN INCHES (mm).
2. cULus LISTED.
3. CONFORMS TO UL STANDARD 508, UL STANDARD 244A, TO IP65.

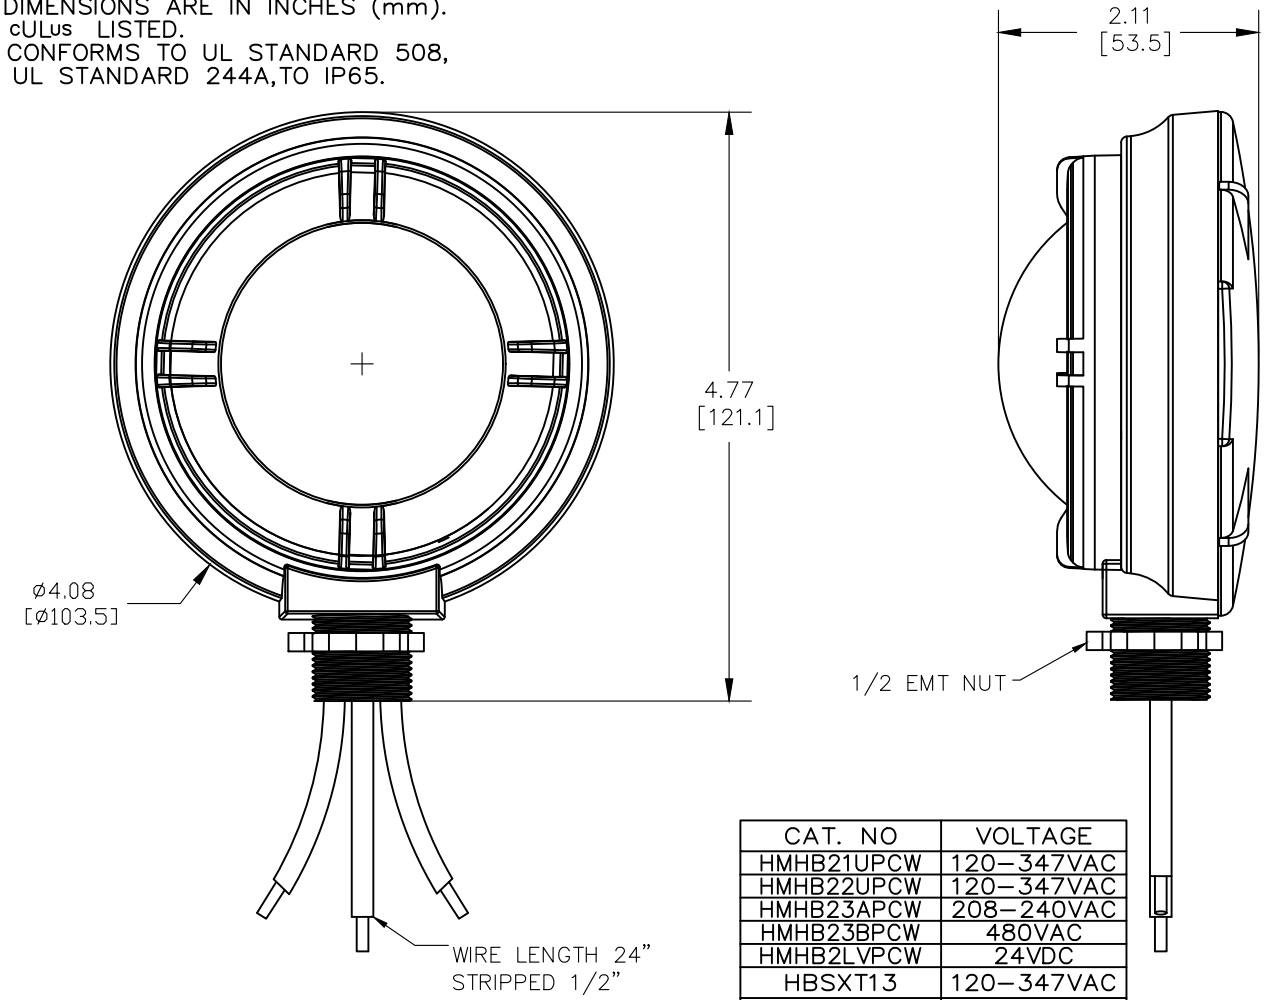

LOAD RATINGS (LINE VOLTAGE UNITS)

120VAC: 0-800W BALLAST OR TUNGSTEN
277VAC: 0-1200W BALLAST
347VAC: 0-1500W BALLAST
208/340VAC: 0-1200W BALLAST
480VAC: 0-2400W BALLAST

CAT. NO	VOLTAGE
HMHB21UPCW	120-347VAC
HMHB22UPCW	120-347VAC
HMHB23APCW	208-240VAC
HMHB23BPCW	480VAC
HMHB2LVPCW	24VDC
HBSXT13	120-347VAC
HBSXT28	208-240VAC
HBSXT48	480VAC
HBSXT24	24VDC
HBSXT13D	120-347VAC
HBSXT28D	208-240VAC
HBSXT48D	480VAC
HBSXT24D	24VDC

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BASE	PLASTIC	WHITE
NUT	STEEL	Zn-PLATE

SYM	REVISIONS	APP	DATE
2	ADDED HBSXTXXX CATS AND SPECS TO TABLE UPDATED DIMS, REMOVED .52[13.3] DIM PER DCN 23353. MYA	DDL	10/17/17
1	RELEASED CUSTOMER DRAWING PER DCN# 19677 MJZ, PJB	PJB	3/8/13

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
HIGH BAY
OCCUPANCY SENSOR
IP65 WATER TIGHT

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ±.01
.XXX = ±.005
ANGLES = ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY MJZ	APP. BY PJB
TR. BY MJZ	SCALE NONE
CHK. BY MJZ	DATE 3/8/13

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-12401

2