M-13884 | 1

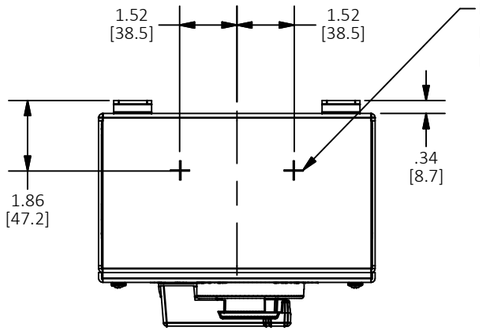

DRILL SPOTS FOR 1-¼"NPT CONDUIT FITTING, (6) PLACES.
PROVISION FOR TOP, BOTTOM, & BACK FEED.
INSTALLER TO DRILL OR PUNCH Ø1-¾ INCH (Ø44.5 mm) HOLE FOR CONDUIT FITTING.

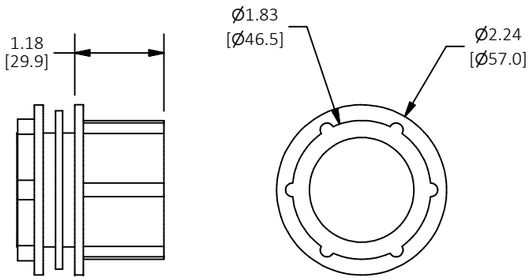

1-¼ INCH NPT CONDUIT FITTING, (2) INCLUDED

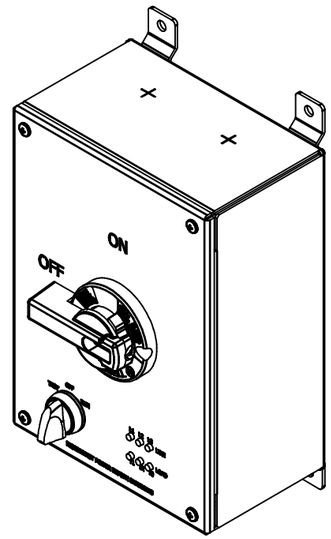

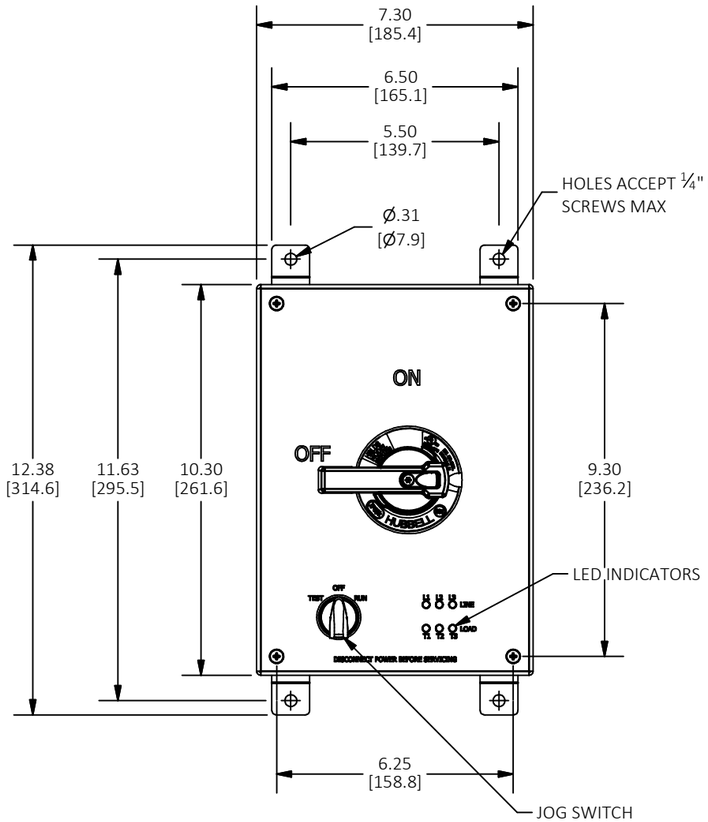

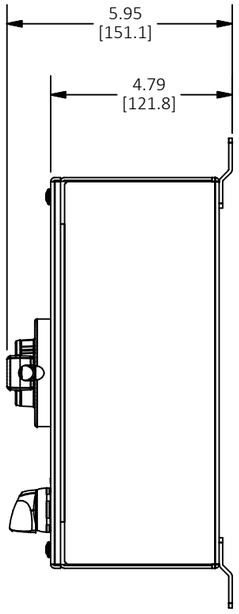

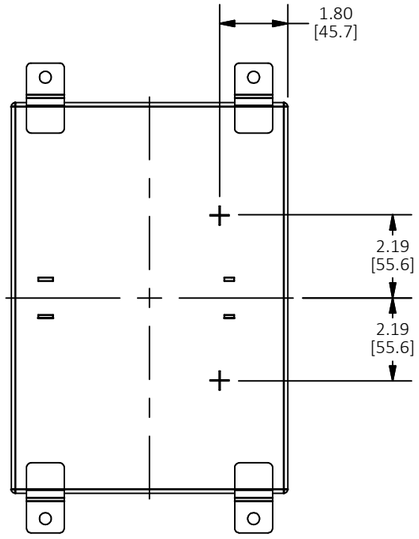

NOTES:
1. CATALOG NUMBERS: HBLDS6SSPJ, HBLDS10SSPJ.
2. DIMENSIONS SHOWN ARE IN INCHES [mm].
3. ENCLOSURE TYPE 4X & 12.
4. cULus LISTED.
5. NSF CERTIFIED AND IP69K RATING

CAT NO. HBLDS6SSPJ (60 AMP 600 VAC)	
HP	VOLTAGE
7.5 HP (5.6kW)	120 VAC 1 Ø
15 HP (11.19 kW)	200-240 VAC 1 Ø
30 HP (22.37 kW)	480 VAC 1 Ø
30 HP (22.37 kW)	200-240 VAC 3 Ø
50 HP (37.28 kW)	480 VAC 3 Ø
50 HP (37.28 kW)	600 VAC 3 Ø

CAT NO. HBLDS10SSPJ (100 AMP 600 VAC)	
HP	VOLTAGE
7.5 HP (5.6kW)	120 VAC 1 Ø
15 HP (11.19 kW)	200-240 VAC 1 Ø
30 HP (22.37 kW)	480 VAC 1 Ø
30 HP (22.37 kW)	200-240 VAC 3 Ø
50 HP (37.28 kW)	480 VAC 3 Ø
50 HP (37.28 kW)	600 VAC 3 Ø

CAGE CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
ENCLOSURE & HARDWARE	STAINLESS STEEL	
HANDLE & MOUNT	PBT	
GASKET	EPDM FOAM	
CONDUIT HUB	ZINC	
LED/PCBD		
LENS	PC	
GROUND BUS		
JOG SW.	POLYIMIDE	



SCALE: ⅛
EMBEDDED 3D CAD MODEL IN FILE
"M-13884_ACAD.dwg"

REV	DESCRIPTION	APP	DATE
1	RELEASED PER DCN #23623 AD	TLS	06/04/18

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE
CIRCUIT-LOCK™ 60/100 AMP STAINLESS STEEL DISCONNECT SWITCH, LED INDICATORS, JOG SWITCH

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ± .01
.XXX= ± .005
ANGLE TOL. ±2°

DR. BY	AD	SCALE	1 / 4
CHK. BY	CAC	DATE	03/09/18

DIMENSION SHEET FOR CAT. NO.
HBLDS6SSPJ, HBLDS10SSPJ

B
M-13884
1