

# H-MOSS® Controls Passive Infrared Wall Switches

## Features

- Smart Motion Activated Nightlight to provide illumination when the lights are OFF
- Independent Timers for the Nightlight and Lighting Load
- No Neutral Required
- Matching wallplate included

## Ordering Information

Description	Color	UPC Number	Catalog Number
Wall Switch Sensor with Smart Nightlight	Ivory	783585427928	WS2001NSI

## Listings

cULus Listed  
ASHRAE 90.1  
CEC Title 24 Certified

## Specifications

Housing	Flame retardant UL 94 V-0 ABS
Lens	Impact-resistant polyethylene
Dimensions	Face 2.59"H x 1.30"W, 0.61"D (from wall out)
Mounting Height	42 to 54 inches above floor
Sensing	Passive Infrared


## Performance

Controls	
Front Press Switch	On/Off Button
Timer Time Outs	Manual 30 seconds to 30 minutes, Independent Timers for Nightlight & Lighting Load

Electrical	
Ratings	120V AC, 60Hz; Load Capacity 0 to 1000 watts, 277V AC, 60Hz, 6.5A, Ballast/Driver

Environmental	
Operating Temperature	Indoor Use Only, 32°F to 122°F (0°C to 50°C) with rate of change not exceeding 20°F (11°C) per hour; 20% to 90% non-condensing relative humidity

# HUBBELL

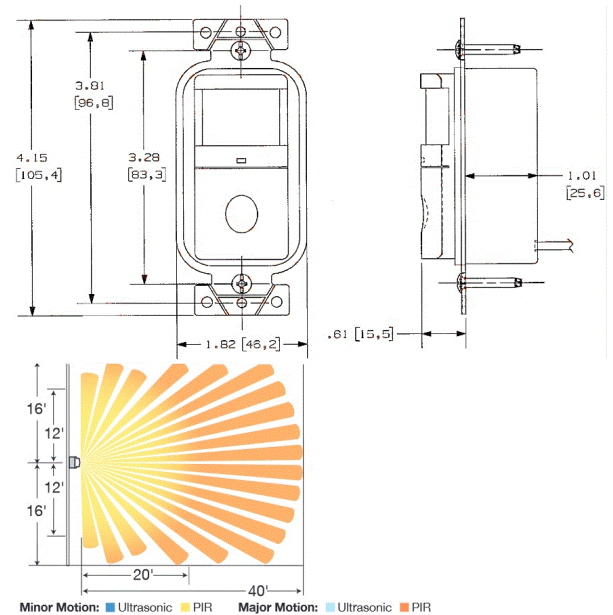

## Complementary Products

SS Wallplate	SS26
Snap-On Wallplate	RCW1W

## Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

