

MULTIGANG SWITCH BOXES


DRAWN
2-1/8" DEEP

WITH RAISED GROUND EMBOSS & DEVICE EARS

Boxes with Pigtail Features:

- 7" Solid Cu. #12AWG Pigtail
- Pre-assembled with Ground Emboss and 10-32 Ground Screw


Cat. No.	No. of Gangs	Bracket & Setback	Knockouts		Dimension W x H	Cu. Inch	Std. Pkg.
			Sides	Bottom			
DHB-2	2	-	4 - 1/2", 4 - CKO	2 - 1/2", 2 - 3/4"	4" x 4"	30.3	25
DHB-2-B	2	B, 9/16"	2 - 1/2", 4 - CKO	2 - 1/2", 2 - 3/4"	4" x 4"	30.3	25
DHB-2-FB	2	FB, 9/16"	2 - 1/2", 4 - CKO	2 - 1/2", 2 - 3/4"	4" x 4"	30.3	25
DHB-3	3	-	4 - 1/2", 6 - CKO	2 - 1/2", 2 - 3/4"	5-3/4" x 4"	44.0	25
DHB-3-PT NEW	3	-	4 - 1/2", 6 - CKO	2 - 1/2", 2 - 3/4"	5-3/4" x 4"	44.0	25
DHB-3-B	3	B, 9/16"	2 - 1/2", 6 - CKO	2 - 1/2", 2 - 3/4"	5-3/4" x 4"	44.0	20
DHB-3-FB	3	FB, 9/16"	2 - 1/2", 6 - CKO	2 - 1/2", 2 - 3/4"	5-3/4" x 4"	44.0	20
DHB-4	4	-	4 - 1/2", 8 - CKO	5 - 1/2", 4 - 3/4"	7-1/2" x 4"	57.8	20
DHB-4-B	4	B, 9/16"	2 - 1/2", 8 - CKO	5 - 1/2", 4 - 3/4"	7-1/2" x 4"	57.8	20
DHB-4-FB	4	FB, 9/16"	2 - 1/2", 8 - CKO	5 - 1/2", 4 - 3/4"	7-1/2" x 4"	57.8	20

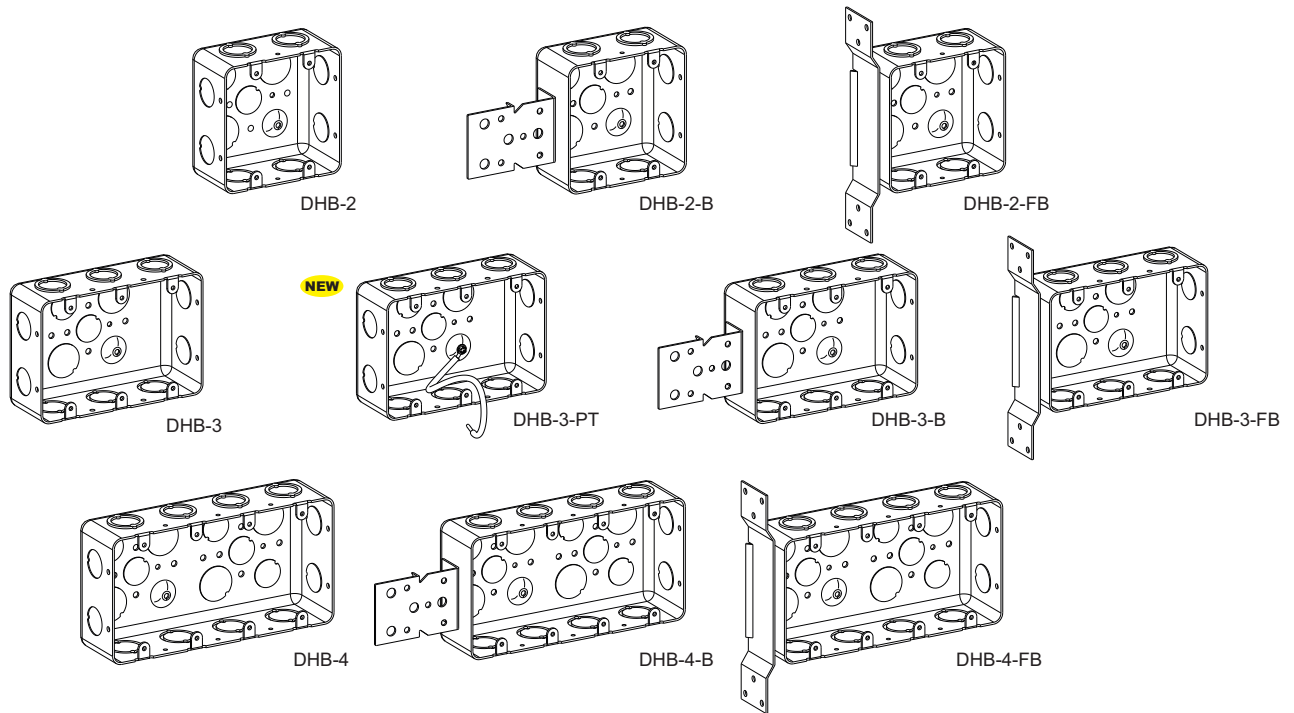

MASONRY BOXES WITH DEVICE EARS

2-1/2" DEEP

Cat. No.	No. of Gangs	Bracket & Setback	Knockouts		Dimension W x H	Cu. Inch	Std. Pkg.
			Sides	Bottom			
MSB-3-FB	3	FB, 9/16"	8 - CKO	3 - CKO	5-1/2" x 3-3/4"	47.9	20
MSB-4-FB	4	FB, 9/16"	10 - CKO	4 - CKO	7-3/8" x 3-3/4"	63.6	20
MSB-5-FB	5	FB, 9/16"	12 - CKO	5 - CKO	9-1/8" x 3-3/4"	79.6	20
MB-D	2-1/2" / 3-1/2" Partition for MSB and MB boxes				3-1/4" x 3-1/2"	-	25

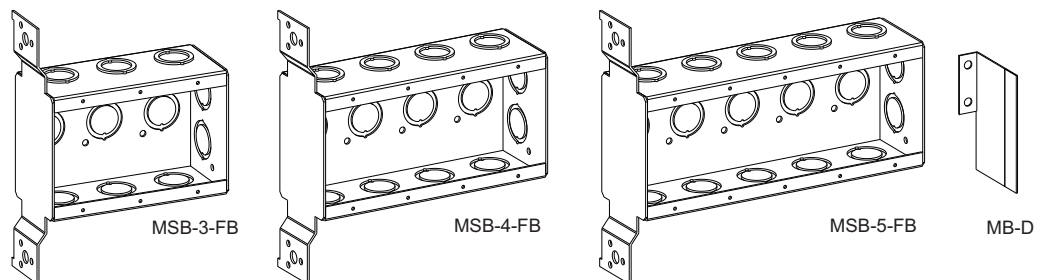

- **600V** MKO's and CKO's suitable for bonding without any additional bonding means up to 600V
- Acceptable for use in 2-hour rated walls (2-Gang only)
- Visit www.ul.com or QCIT Guide on page W1 for more information