

UCFCF 4-Bolt Piloted Flange Units





B-type Seal



L3-type Seal

Standard duty with set screw lock.

- Cast iron housing
- Wide inner race bearing
- Available with eccentric locking collar bearing
- B-type seals
- L3-type seals available in some sizes

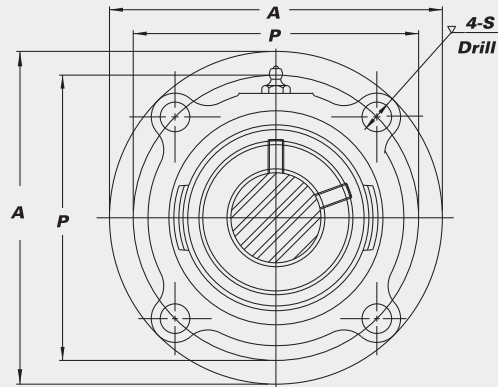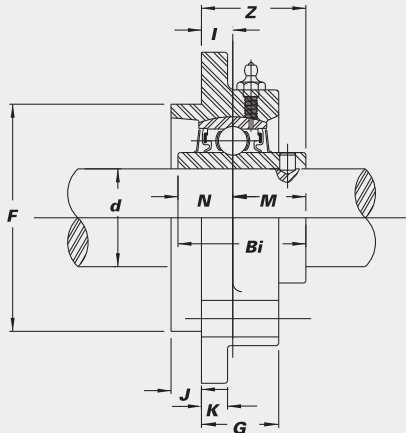

STANDARD PRODUCTS

Unit No.	Shaft Dia.		Dimensions (in.) (mm)												Bolt Used	Bearing No.	Housing No.	Weight (lbs.)
	d		A	P	S	J	K	G	F	I	Z	Bi	N	M				
UCFCF 205-14	7/8															UC 205-14		
205-15	15/16															205-15	FCF 205	2.6
205		25	4 3/8	3 5/8	1 3/32	1/4	3/8	55/64	3.000	7/16	1 7/32	1.3386	0.5630	0.7756	5/16	205		
205-16	1		111	92.1	10.3	6	10	22	76.2	11	31.0	34.0	14.3	19.7		205-16		
UCFCF 206-17	1 1/16															UC 206-17		
206-18	1 1/8															206-18	FCF 206	3.9
206		30	5	4 1/8	1 5/32	2 7/64	3/8	25/32	3.375	1 9/64	1 11/64	1.5000	0.6260	0.8740	3/8	206		
206-19	1 3/16		127	104.8	11.9	11	10	20	85.7	7.5	29.8	38.1	15.9	22.2		206-19		
206-20	1 1/4															206-20		
UCFCF 207-20	1 1/4															UC 207-20		
207-21	1 5/16															207-21	FCF 207	4.2
207-22	1 3/8															207-22		
207		35	5 1/4	4 3/8	1 5/32	1 5/32	1/2	7/8	3.625	9/32	1 1/32	1.6890	0.6890	1.0000	3/8	207		
207-23	1 7/16		133	111.1	11.9	12	12	22	92.1	7	32.5	49.9	17.5	25.4		207-23		
UCFCF 208-24	1 1/2															UC 208-24		
208-25	1 9/16															208-25	FCF 208	4.6
208		40	5 1/4	4 3/8	1 5/32	1 5/32	1/2	1 1/32	3.625	3/8	1 9/16	1.9370	0.7480	1.1890	3/8	208		
UCFCF 209-26	1 5/8															UC 209-26		
209-27	1 11/16															209-27	FCF 209	6.2
209-28	1 3/4															209-28		
209		45	6 1/8	5 1/8	1 7/32	1 5/32	2 9/64	7/8	4.250	7/32	1 13/32	1.9370	0.7480	1.1890	7/16	209		
UCFCF 210-30	1 7/8															UC 210-30		
210-31	1 15/16															210-31	FCF 210	7.0
210		50	6 3/8	5 3/8	1 7/32	5/8	1/2	1 1/16	4.500	1 1/32	1 5/8	2.0315	0.7480	1.2835	7/16	210		
210-32	2S		162	136.5	13.5	16	12	27	114.3	9	41.3	51.6	19.0	32.6		210-32		
UCFCF 211-32	2															UC 211-32		
211-34	2 1/8															211-34	FCF 211	9.1
211		55	7 1/8	6	1 9/32	7/8	1/2	7/8	5.000	7/32	1 17/32	2.1890	0.8740	1.3150	1/2	211		
211-35	2 9/16		181	152.4	15.1	22	12	22	127.0	5.5	38.9	55.6	22.2	33.4		211-35		

Interchange Page 47