




Thermoplastic Pillow Blocks

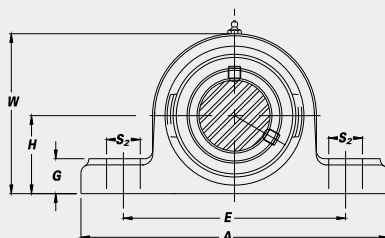

B-type Seal

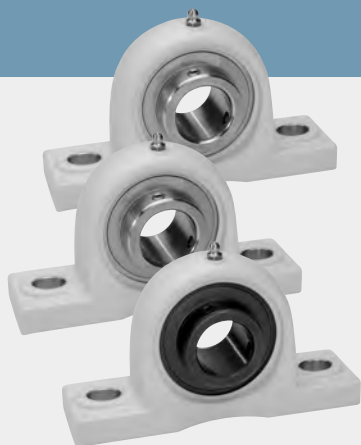

L3-type Seal

With Set Screw Lock

Optional bearing inserts:
Stainless Steel-SUCTP
Hard Chrome Coated-CUCTP
Black Oxide-BUCTP

• End Caps Available for all styles.

B-type seal available in all styles and sizes.

L3-type seal available in SUC units only. Limited sizes. Consult IPTCI for speed limitations.

CORROSION RESISTANT

Unit No.	Shaft Dia.		Dimensions (in.) (mm)										Bolt Used	Bearing No.	Housing No.	Weight (lbs.)
	d	(in.) (mm)	H	A	E	B	S ₂	S ₁	G	W	Bi	N	M			

SUCTP with Stainless Steel Bearing Inserts

SUCTP 201-8 202-10 204-12 204	1/2 5/8 3/4	20	1 5/16 33.3	5 127	3 3/4 95	1 1/2 38	9/16 14	7/16 11	9/16 14	2 19/32 66	1.2205 31.0	0.5000 12.7	0.7205 18.3	3/8	SUC 201-8 202-10 204-12 204	TP 204	.8
SUCTP 205-14 205 205-16	7/8 1	25	1 7/16 36.5	5 1/2 140	4 1/8 105	1 1/2 38	9/16 14	7/16 11	9/16 14	2 13/16 71	1.3386 34.0	0.5630 14.3	0.7756 19.7	3/8	SUC 205-14 205 205-16	TP 205	.8
SUCTP 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4 S	30	1 11/16 42.9	6 13/32 163	4 11/16 119	1 13/16 46	23/32 18	9/16 14	11/16 18	3 19/64 84	1.5000 38.1	0.6260 15.9	0.8740 22.2	1/2	SUC 206-18 206 206-19 206-20	TP 206	1.2
SUCTP 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	1 7/8 47.6	6 5/8 168	5 127	1 29/32 48	23/32 18	9/16 14	11/16 18	3 11/16 94	1.6890 42.9	0.6890 17.5	1.0000 25.4	1/2	SUC 207-20 207-21 207-22 207 207-23	TP 207	1.7
SUCTP 208-24 208	1 1/2	40	1 15/16 49.2	7 1/4 184	5 7/16 137	2 1/8 54	23/32 18	9/16 14	25/32 20	3 29/32 99	1.9370 49.2	0.7480 19.0	1.1890 30.2	1/2	SUC 208-24 208	TP 208	2.2

CUCTP with Hard Chrome Coated Bearing Inserts

CUCTP 204-12 204	3/4	20	1 5/16 33.3	5 127	3 3/4 95	1 1/2 38	9/16 14	7/16 11	9/16 14	2 19/32 66	1.2205 31.0	0.5000 12.7	0.7205 18.3	3/8	CUC 204-12 204	TP 204	.8
CUCTP 205-14 205 205-16	7/8 1	25	1 7/16 36.5	5 1/2 140	4 1/8 105	1 1/2 38	9/16 14	7/16 11	9/16 14	2 13/16 71	1.3386 34.0	0.5630 14.3	0.7756 19.7	3/8	CUC 205-14 205 205-16	TP 205	.8
CUCTP 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4 S	30	1 11/16 42.9	6 13/32 163	4 11/16 119	1 13/16 46	23/32 18	9/16 14	11/16 18	3 19/64 84	1.5000 38.1	0.6260 15.9	0.8740 22.2	1/2	CUC 206-18 206 206-19 206-20	TP 206	1.2
CUCTP 207-20 207-22 207 207-23	1 1/4 1 3/8 1 7/16	35	1 7/8 47.6	6 5/8 168	5 127	1 29/32 48	23/32 18	9/16 14	11/16 18	3 11/16 94	1.6890 42.9	0.6890 17.5	1.0000 25.4	1/2	CUC 207-20 207-22 207 207-23	TP 207	1.7
CUCTP 208-24 208	1 1/2	40	1 15/16 49.2	7 1/4 184	5 7/16 137	2 1/8 54	23/32 18	9/16 14	25/32 20	3 29/32 99	1.9370 49.2	0.7480 19.0	1.1890 30.2	1/2	CUC 208-24 208	TP 208	2.2

BUCTP with Black Oxide Bearing Inserts

BUCTP 201-8 202-10 204-12 204	1/2 5/8 3/4	20	1 5/16 33.3	5 127	3 3/4 95	1 1/2 38	9/16 14	7/16 11	9/16 14	2 19/32 66	1.2205 31.0	0.5000 12.7	0.7205 18.3	3/8	BUC 201-8 202-10 204-12 204	TP 204	.8
BUCTP 205-14 205 205-16	7/8 1	25	1 7/16 36.5	5 1/2 140	4 1/8 105	1 1/2 38	9/16 14	7/16 11	9/16 14	2 13/16 71	1.3386 34.0	0.5630 14.3	0.7756 19.7	3/8	BUC 205-14 205 205-16	TP 205	.8
BUCTP 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4 S	30	1 11/16 42.9	6 13/32 163	4 11/16 119	1 13/16 46	23/32 18	9/16 14	11/16 18	3 19/64 84	1.5000 38.1	0.6260 15.9	0.8740 22.2	1/2	BUC 206-18 206 206-19 206-20	TP 206	1.2
BUCTP 207-20 207-22 207 207-23	1 1/4 1 3/8 1 7/16	35	1 7/8 47.6	6 5/8 168	5 127	1 29/32 48	23/32 18	9/16 14	11/16 18	3 11/16 94	1.6890 42.9	0.6890 17.5	1.0000 25.4	1/2	BUC 207-20 207-22 207 207-23	TP 207	1.7
BUCTP 208-24 208	1 1/2	40	1 15/16 49.2	7 1/4 184	5 7/16 137	2 1/8 54	23/32 18	9/16 14	25/32 20	3 29/32 99	1.9370 49.2	0.7480 19.0	1.1890 30.2	1/2	BUC 208-24 208	TP 208	2.2